


# Perforated Coil


These coil perforations can be run at widths up to 1220mm wide.  
 Maximum thickness for aluminium of 3.0mm  
 Maximum thickness for cold rolled and coloursteel of 1.5mm

## R025C08C / P119C

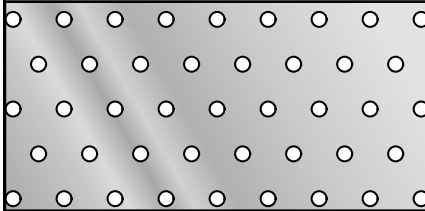


Ø2.50mm @ 8.62mm ctrs  
 7.6% Open Area

## R025A23C / P120C

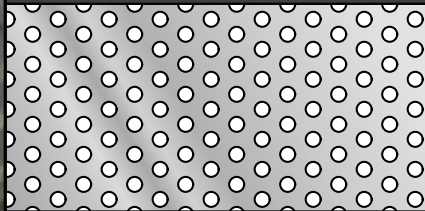


Ø2.50mm @ 5.00mm ctrs  
 22.7% Open Area

## R030C33C / P129C

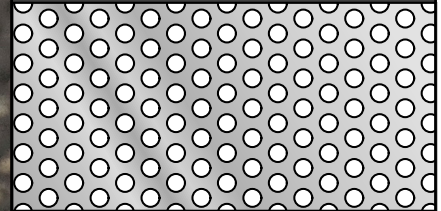


Ø3.00mm @ 5.00mm ctrs  
 32.6% Open Area

## R030A11C / P135C

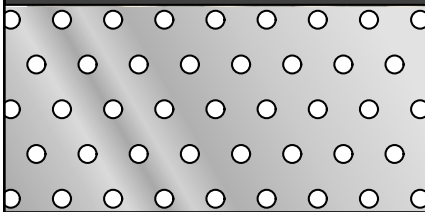


Ø3.00mm @ 8.62mm ctrs  
 11.0% Open Area

## R033C44C / P140C

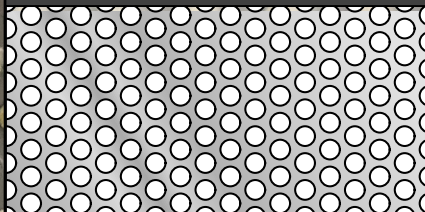


Ø3.30mm @ 4.72mm ctrs  
 44.3% Open Area

## R032A23C / P143C

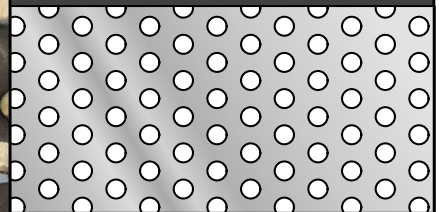


Ø3.20mm @ 6.38mm ctrs  
 22.8% Open Area

## R033A16C / P144C

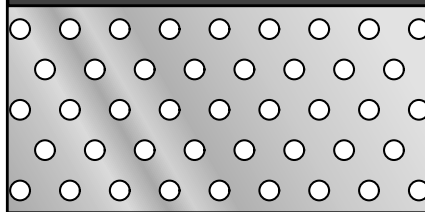


Ø3.30mm @ 7.92mm ctrs  
 15.7% Open Area

## R032A08C / P145C

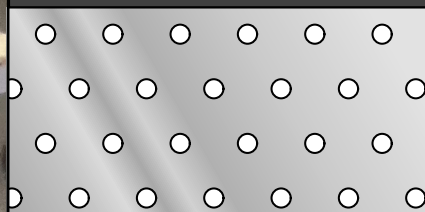


Ø3.20mm @ 10.73mm ctrs  
 8.1% Open Area


## R040A20C / P160C

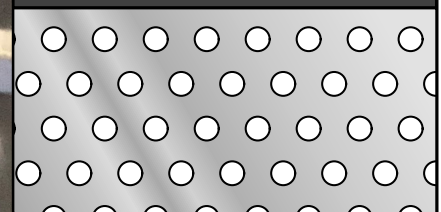

Ø4.00mm @ 8.62mm ctrs  
 19.5% Open Area

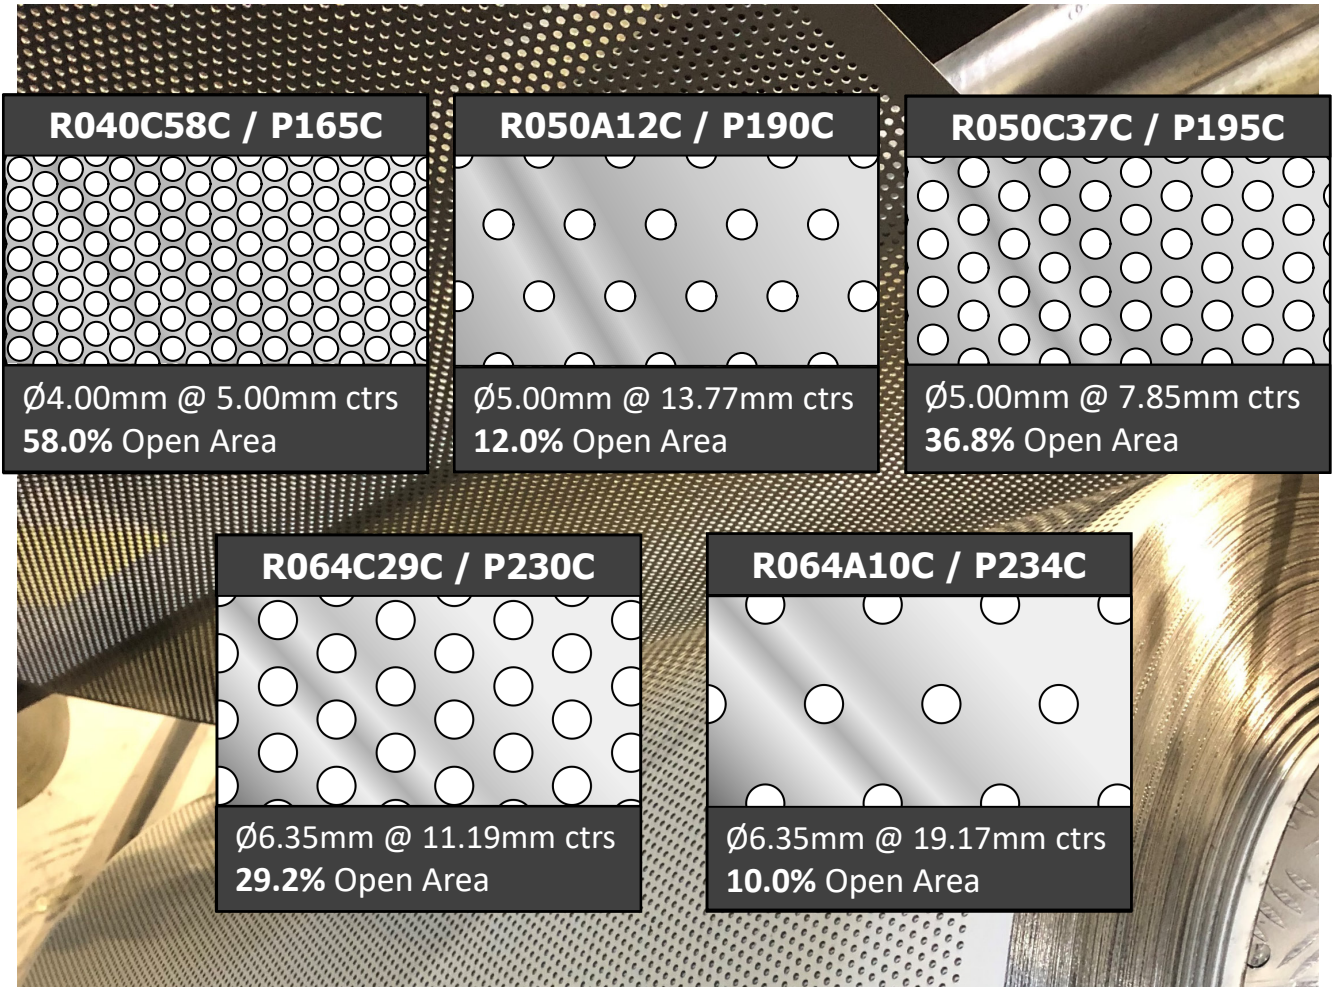


**R040C58C / P165C**

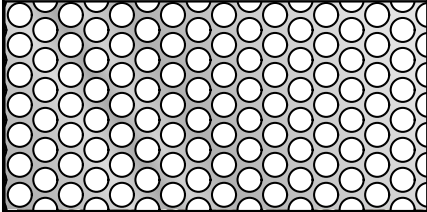


Ø4.00mm @ 5.00mm ctrs  
58.0% Open Area

**R050A12C / P190C**

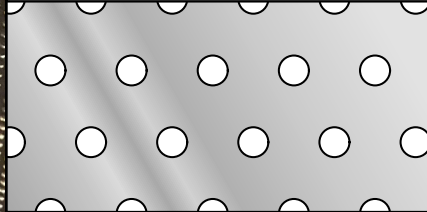

Ø5.00mm @ 13.77mm ctrs  
12.0% Open Area

**R050C37C / P195C**

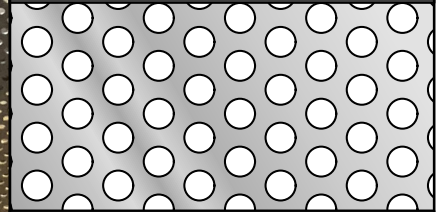


Ø5.00mm @ 7.85mm ctrs  
36.8% Open Area

**R064C29C / P230C**



Ø6.35mm @ 11.19mm ctrs  
29.2% Open Area


**R064A10C / P234C**

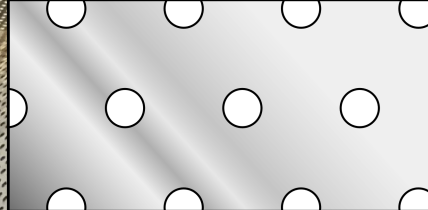

Ø6.35mm @ 19.17mm ctrs  
10.0% Open Area

This coil perforation can be run at widths up to 650mm wide.

**O180S25C / P750C**

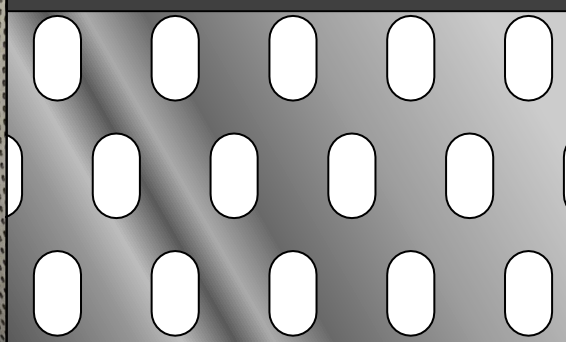

Ø10.0mm x 18mm obrounds  
@ 25.0mm x 25.0mm side stagger  
35.4% Open Area